



# AQUA-BRIC®



4" W x 8" L x 2.375" H

Aqua-Bric provides classic New England style with the added benefit of allowing stormwater to drain through and infiltrate into the soil below.



IdealBlock.com | info@IdealBlock.com | 800-24-IDEAL



## COLORS



Vineyard Blend



Quarry Blend



Beacon Hill Blend

## FEATURES



## APPLICATIONS



## PALLET OVERVIEW

PIECES PER PALLET	486
PIECES PER SECTION	81
PIECES PER SQFT	4.5
SQFT PER PALLET	108 sqft
WEIGHT PER PALLET	2675 lb



## AQUA-BRIC®




### FEATURES

- ▶ Classic rectangular shape with traditional finish
- ▶ Provides 100% stormwater infiltration - up to 10" of rainfall per hour over the 30-year+ design life of the pavement
- ▶ Less deicers needed - snow and ice melt drain through the openings, which means less slip hazard for pedestrians and vehicles
- ▶ Qualifies for credits under the LEED® Green Building Certification System
- ▶ Forms a skid and slip-resistant surface with notched openings that comply with ADA criteria for joint spacing and chamfer width
- ▶ Suitable for walkways, patios, sidewalks, courtyards, plazas and residential driveways
- ▶ Non-structural openings can be cleaned and replaced to achieve 100% infiltration without compromising the pavement

### PHYSICAL CHARACTERISTICS


Aqua-Bric pavers meet or exceed North American industry standards, including the requirements of ASTM C 936 for Solid Concrete Interlocking Paving Stones and CSA Standards for freeze-thaw performance. Our strict quality control ensures consistent strength, color and size.

Nominal Size	4" x 8" • 4.5 pcs/sq ft
Thickness	2.375" (6cm) <i>Note: a 3.125" (8cm) thickness, Aqua-Bric 8, is also available.</i>
Compressive Strength	8500 psi minimum
Water Absorption	5% maximum
Freeze Thaw	No Effect
Slip and Skid Resistance	Excellent to ADA

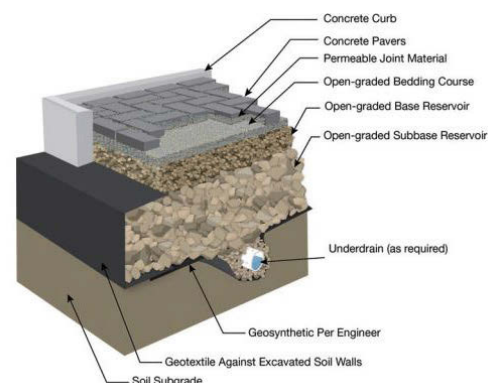


### PATTERNS & GUIDELINES


- ▶ Can be installed in running bond, herringbone or basketweave designs
- ▶ Please visit our website for complete list of patterns



90° Herringbone



45° Herringbone



Running Bond



Deicing Advisory



Permeable

### TECHNICAL SERVICES

Please call our sales office or visit our website for complete technical information and literature.

We also offer design consultation, specification assistance, and job-site quality review upon request.