



# AQUA-BRIC® 8



4.5" W x 9" L x 3.125" H  
(28 units per layer)



4.5" W x 13.5" L x 3.125" H  
(8 units per layer)

Aqua-Bric 8 offers the pedestrian-friendly features of Aqua-Bric in a larger and thicker size that is suited for heavy-duty traffic loads found in parking lots, entrance drives and low-speed roadways and streets.



IdealBlock.com | info@IdealBlock.com | 800-24-IDEAL



## COLORS



Vineyard Blend



Quarry Blend



Beacon Hill Blend

## FEATURES



## APPLICATIONS



## PALLET OVERVIEW

PIECES PER PALLET	7 layers
PIECES PER SECTION	11.25 sqft/layer
PIECES PER SQFT	3.55
SQFT PER PALLET	78.75 sqft
WEIGHT PER PALLET	2775 lb



## AQUA-BRIC® 8




### FEATURES

- ▶ Classic rectangular shape with traditional finish
- ▶ Designed to accommodate heavy-duty traffic loads with a pedestrian friendly ADA compliant surface
- ▶ Provides 100% stormwater infiltration - up to 10" of rainfall per hour over the 30-year+ design life of the pavement
- ▶ Less deicers needed - snow and ice melt drain through the openings, which means less slip hazard for pedestrians and vehicles
- ▶ Openings capture sediment at the surface where it is accessible to conventional sweepers
- ▶ Qualifies for credits under the LEED® Green Building Certification System
- ▶ Forms a skid and slip-resistant surface with notched openings that comply with ADA criteria for joint spacing and chamfer width
- ▶ Suitable for residential, commercial and municipal pavement applications and can be mechanically installed for cost savings on larger projects
- ▶ Capable of supporting H20 loads
- ▶ Larger piece eliminates need for stone replacement during machine set
- ▶ **This product is Made to Order only (contact your local Ideal dealer for availability)**

### PHYSICAL CHARACTERISTICS


Aqua-Bric 8 pavers meet or exceed North American industry standards, including the requirements of ASTM C 936 for Solid Concrete Interlocking Paving Stones and CSA Standards for freeze-thaw.

Nominal Size	4.5" x 9" (28 units per layer) • 4.5" x 13.5" (8 units per layer)
Thickness	3.125" (8cm)
Coverage	11.25 sqft per layer
Compressive Strength	8500 psi minimum
Water Absorption	5% maximum
Freeze Thaw	No Effect
Slip and Skid Resistance	Excellent to ADA

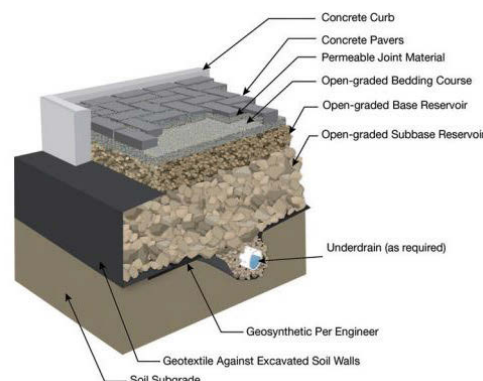

### PATTERNS & GUIDELINES

- ▶ Please visit our website for complete list of patterns



Cluster Pattern



Random Herringbone Pattern



Deicing Advisory



Permeable

### TECHNICAL SERVICES

Please call our sales office or visit our website for complete technical information and literature.

We also offer design consultation, specification assistance, and job-site quality review upon request.