

YANKEE COBBLE™ PAVERS



IDEAL
PAVERS | WALLS | ELEMENTS




YANKEE COBBLE™ PAVERS

TRADITIONAL

FEATURES

- ▶ Traditional Finish with pressed edges and dimpled surface
- ▶ Mix-n-Match Packaging – Choice of shape, size and color
- ▶ Circle Pak allows you to integrate circles into your design

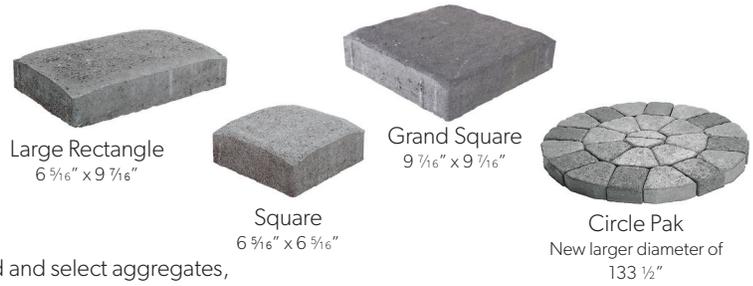

COMPOSITION & PERFORMANCE

- ▶ Manufactured under controlled factory conditions using a cement-rich blend and select aggregates, the units are saturated throughout with pure iron oxide pigments
- ▶ Features pressed corners and a dimpled texture that provides a turn-of-the-century look
- ▶ Suitable for residential, commercial and municipal applications - walkways, driveways, patios, pool decks, sidewalks, plazas, courtyards and pavements where traffic is limited to personal vehicles
- ▶ Offers a skid and slip-resistant surface, and when properly installed, are snow-plow safe

PHYSICAL CHARACTERISTICS


Yankee Cobble Pavers meet or exceed North American industry standards, including the strength, absorption, and freeze-thaw requirements of ASTM C 936 for Solid Concrete Interlocking Paving Stones. Our strict quality control ensures consistent strength, color and size.

Nominal Size/Coverage


Squares	6 5/16" x 6 5/16" (160 x 160mm) • 3.62 pcs/sf
Large Rectangles	6 5/16" x 9 7/16" (160 x 240mm) • 2.42 pcs/sf
Grand Square	9 7/16" x 9 7/16" (240 x 240mm) • 1.61 pcs/sf
Circle Pak	Diameter of 133 1/2"
Thickness	2 3/8" (6cm)
Compressive Strength	8500 psi minimum
Water Absorption	5% maximum
Freeze Thaw	No Effect
Slip Resistance	Excellent to ADA

INSTALLATION & PATTERNS


- ▶ Can be installed in herringbone, running bond and random pattern layouts
- ▶ Packaged individually for greater design flexibility and choice, allowing you to create a variety of patterns without having unnecessary stones left over
- ▶ Please see our *Yankee Cobble™ and MillStone™ Patterns with Style* for additional pattern options




90° Herringbone



Pattern 6



Running Bond



GS Pattern 10

PALLET OVERVIEW

PRODUCT	WT/BLOCK	PCS/SECT	SF/SECT	PCS/CU	SF/CU	WT/CU
Square	7.53 lb	54	14.9	378	104.42	2850 lb
Large Rectangle	11.66 lb	54	22.3	270	111.57	3150 lb
Grand Square	16.94 lb	36	22.4	180	111.8	3050 lb
Circle Pak	-	-	-	-	97.21	2690 lb

COLORS



Beacon Hill Blend
Square, Large Rectangle, Circle Pak Only



Vineyard Blend



Quarry Blend



Graphite
Square, Large Rectangle, Circle Pak Only



This product is susceptible to scuffing during installation. Use a urethane pad attached to the compactor plate or spread a thin layer of sand or sheet of geotextile fabric over the surface when compacting.



Deicing Advisory

TECHNICAL SERVICES

Please call our sales office or visit our website for complete technical information and literature. We also offer design consultation, specification assistance, and job-site quality review upon request.



www.IdealBlock.com
781.894.3200