


# **ANDOVER COLLECTION**<sup>TM</sup> SMOOTH & STONECLEFT



Our Andover Collection pavers offer a choice of profiles and finishes in traditional shapes scaled to complement the trend for larger paving units. Interchange styles and sizes to create a variety of eye-catching patterns, textures and details.



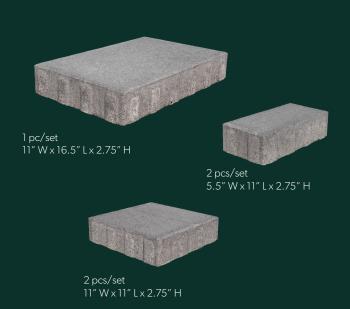

#### **COLORS**



(Smooth Only)

Oxford Grey

#### **FINISH**



#### **FEATURES**



### **APPLICATIONS**









#### **PALLET OVERVIEW**

PIECES PER PALLET 27 sets/pallet PIECES PER LAYER 3 sets/layer PIECES PER SQFT 3.8 sqft/set SQFT PER PALLET 102.6 sqft WEIGHT PER PALLET SM 3200 lb / SC 3100 lb



## ANDOVER COLLECTION™





**FEATURES** 

- ► Available in Smooth or StoneCleft finish
  - Smooth surface version has minimal chamfered edges
  - StoneCleft version features a pronounced cleft and sculpted profile that replicates the look of natural stone
- ► Can be installed as a traditional or permeable pavement
- ▶ Made with our Color 4D Advanced Technology, Andover Collection has deeper, richer colors fortified with superior performance against the elements
- ▶ 2 ¾" thickness for improved flexural strength and weight bearing capacity
- ▶ Ideal for walkways, patios, pool decks, courtyards, residential driveways and plazas

#### PHYSICAL CHARACTERISTICS

Andover Collection meets or exceeds North American industry standards, including the strength, absorption and freeze-thaw requirements. Andover Collection classifies under ASTM C1782 Standard Specification for Utility Segmental Concrete Paving Slabs..

Nominal Size 5-Piece Set: (2) 5.5" x 11" • (2) 11" x 11" • (1) 11" x 16.5"


Thickness  $2 \, 34'' \, (7 \text{cm})$ Coverage  $3.8 \, \text{sqft/set}$ Percentage of Open Area 5.5%

Flexural Strength 725 psi minimum
Water Absorption 5% maximum
Freeze Thaw No Effect

Slip and Skid Resistance Excellent to ADA

#### PATTERNS & GUIDELINES

- ► Andover can be placed in our "Set-Stone" pattern that creates easy to place, impressive arrangements with little or no waste. Consisting of 5 pieces (Figure A), each set is placed as a module in a herringbone pattern. Stones within the module can be rearranged to vary the design as shown in Figure B.
- ▶ Please visit our website for complete list of patterns





This product is susceptible to scuffing during installation and snow removal. Protect the surface when transporting and handling. Use a roller compactor when compacting. When removing snow, the height of the snow blowers and plows must be raised or a poly blade used on the plow edge.





Deicing Advisory

Color 4D

#### TECHNICAL SERVICES

Please call our sales office or visit our website for complete technical information and literature.

We also offer design consultation, specification assistance, and job-site quality review upon request.

